



CITY
Carpet Tiles




Through the city-inspired carpet design, for people to create a unique indoor space.
Let people in the busy life, can feel the charm and vitality of the city,
relax and enjoy life.



City 02

City 03

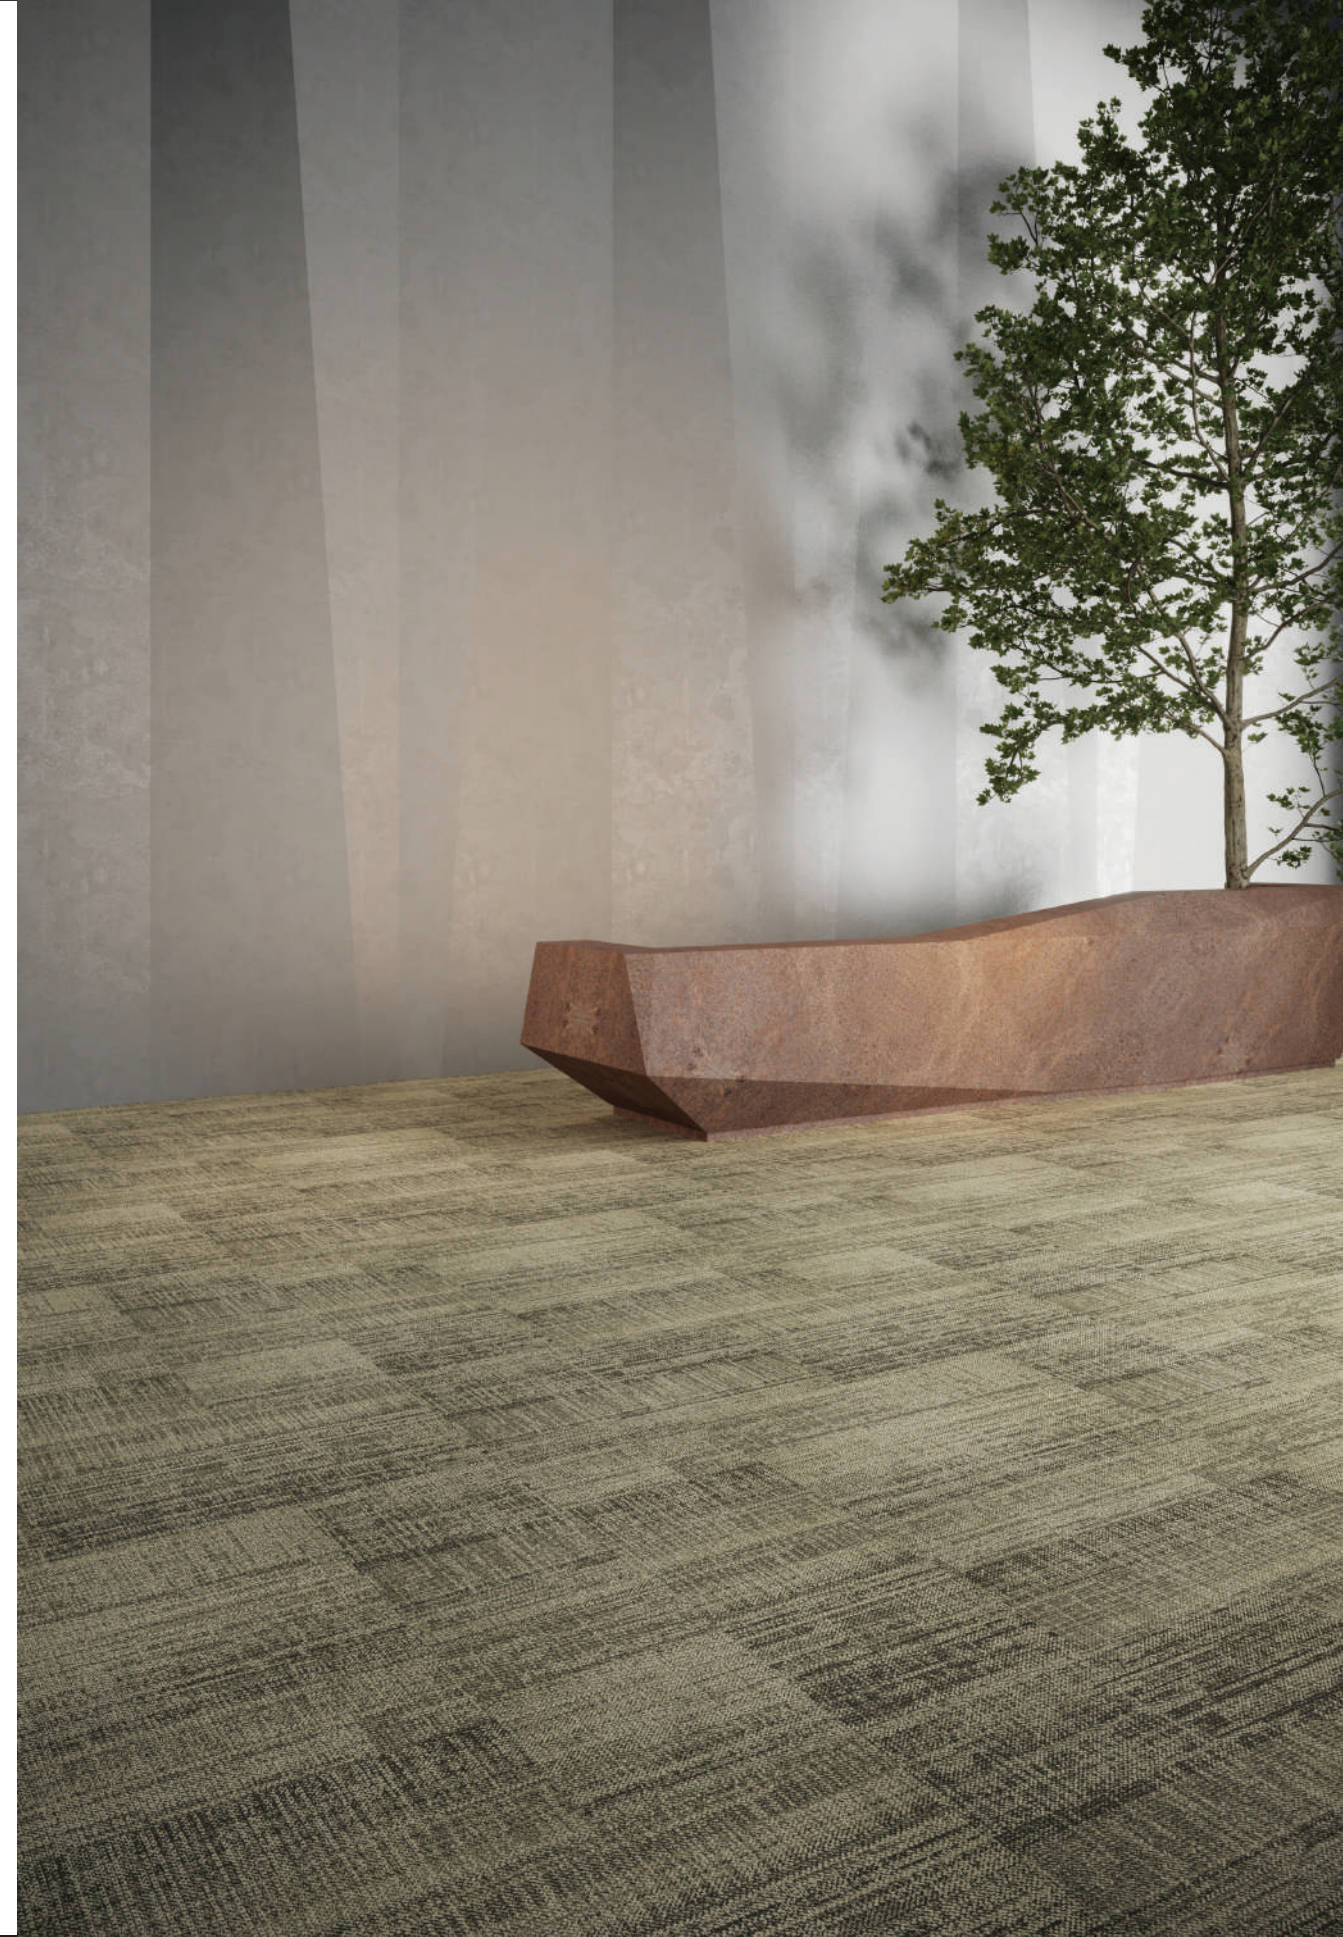



Integration and innovation



City 05



Abstract representative architectural elements of the city, modern high-rise buildings will be transformed into a carpet pattern and texture. Through the outline of lines, color collocation and material selection, showing the three-dimensional feeling and texture of the building. Imitate the appearance of the building modeling, for the space to add an artistic sense!





City 06


Cities are the crystallization of human civilization, full of rich color, texture and story. From old buildings to modern skyscrapers, from busy streets to quiet parks, every corner of the city contains endless design inspiration.








City 02
City 04
City 06
City 07
City 08

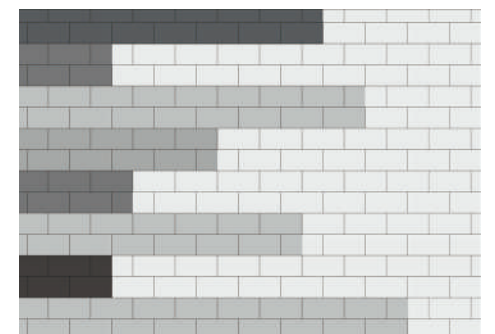

City 08

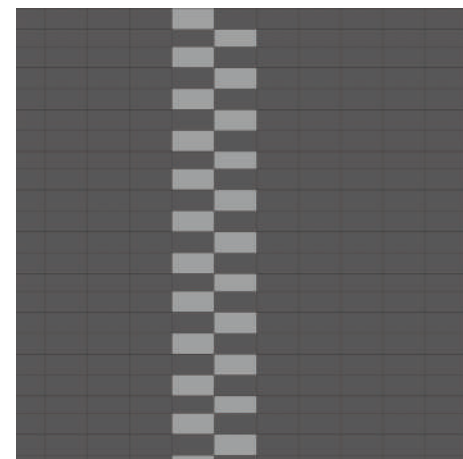

Carpet as a work of art, pay attention to its artistic design and decorative. You can add an artistic atmosphere to the space through exquisite patterns, fine textures and rich colors.

City 01
City 07



City Carpet Tiles



City 01

City 02

City 03

City 04



City 05

City 06

City 07

City 08

SPECIFICATION:

Face yarn:	100% Universal Nylon
Dye method:	100% Solution dyed
Gauge:	1/12
Pile weight:	600g/m ² (±5%)
Total weight:	4500g/m ² (±5%)
Pile height:	4.5mm (±0.5mm)
Total height:	6.5mm (±0.5mm)
Backing:	PVC
Size:	45.72cmx91.44cm(18"x36")
Dimensional stability:	≤0.2%
Packaging box:	16 tiles/6.689 m ²

PERFORMANCE

Classification:	33
Castor chair rating:	A: intensive use
Fire classification :	Class 1 (ASTM E648)
Stain Resistance :	Grade 8(AATCC 175)
Permanent antistatic:	≤2kv (GB/T 18044-2008)
Impact sound insulation:	ΔL _w :26 dB
Sound absorbtion:	Frequency Hz:125 250 500 1000 2000 4000 α _s 0.01 0.05 0.08 0.22 0.34 0.44
Noise reduction:	α _w : 0.20
Colour fastness to light:	5 grade QB/T 2755-2005
Colour fastness to water:	4-5 grade QB/T 2755-2005
Rubbing fastness:	4-5 grade QB/T 2755-2005
Indoor air quality: (GB18587-2001 A grade)	TVOC ≤0.500mg/m ² h Formaldehyde≤ 0.050mg/m ² h Styrene≤ 0.400mg/m ² h 4-phenylcyclohexene≤ 0.050mg/m ² h

