



SYMPHONY  
Carpet Tiles



Symphony 01





Symphony 04




Symphony 03



Symphony 04



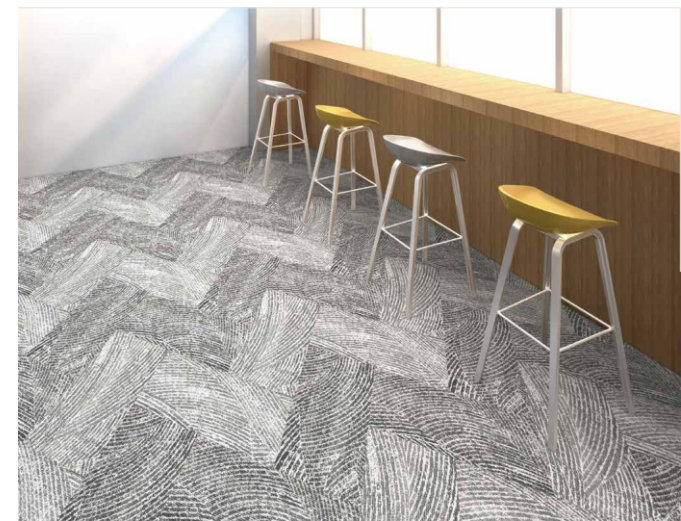

Symphony 08 09



Symphony 05  
Symphony 06



Symphony 06



Symphony 06





Symphony 08 09



Symphony 08

Symphony 09



Symphony 05





Symphony 10

Integration and innovation

Symphony 10





Symphony 01



Symphony 02



Symphony 03



Symphony 04



Symphony 05



Symphony 06




Symphony 07



Symphony 08



Symphony 09

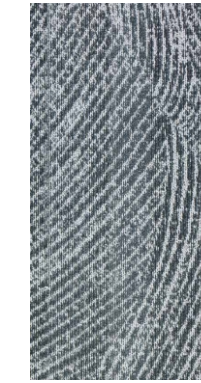

Symphony 10

### SPECIFICATION:

Face yarn:	100% Universal Nylon
Dye method:	100% Solution dyed
Gauge:	1/12
Pile weight:	500±20g/m <sup>2</sup> (±5%)
Total weight:	3170g/m <sup>2</sup> (±5%)
Pile height:	4/3/2mm
Total height:	5mm(±1mm)
Backing:	FPE
Size:	45.72cmx91.44cm(18"x36")
Dimensional stability:	≤0.2%
Packaging box:	16 tiles/6.688 m <sup>2</sup>

### PERFORMANCE

Classification:	33
Castor chair rating:	A: intensive use
Fire classification :	Class 1 (ASTM E648)
Stain Resistance :	Grade 8 (AATCC 175)
Permanent antistatic:	≤2kv (GB/T 18044-2008)
Impact sound insulation:	ΔL <sub>w</sub> :26 dB
Sound absorption:	Frequency Hz:125 250 500 1000 2000 4000 α <sub>s</sub> 0.01 0.05 0.08 0.22 0.34 0.44 α <sub>w</sub> : 0.20
Noise reduction:	α <sub>w</sub> : 0.20
Colour fastness to light:	5 grade QB/T 2755-2005
Colour fastness to water:	4-5 grade QB/T 2755-2005
Rubbing fastness:	4-5 grade QB/T 2755-2005
Indoor air quality:	(GB18587-2001 A grade) TVOC ≤0.500mg/m <sup>2</sup> h Formaldehyde ≤ 0.050mg/m <sup>2</sup> h Styrene ≤ 0.400mg/m <sup>2</sup> h 4-phenylcyclohexene ≤ 0.050mg/m <sup>2</sup> h

