

An aerial photograph of a river delta system. The water is a vibrant blue, branching out into a complex network of channels and distributaries. The surrounding land is a mix of grey, yellow, and green, indicating different soil types and vegetation. The word "SOURCE" is written vertically in large, white, bold, sans-serif capital letters across the center of the image.

# SOURCE

**COLOR YOUR SPACE**





## SOURCE COLLECTION

Innovflor  
The streamlined fresh design and  
the embellishment of bright spots add infinite  
vitality to the serious office  
and it is also a source of happiness.

*Color your space*










Creativity  
involves  
breaking out  
of expected  
patterns in  
order to look  
at things in a  
different way.







SOURCE 02

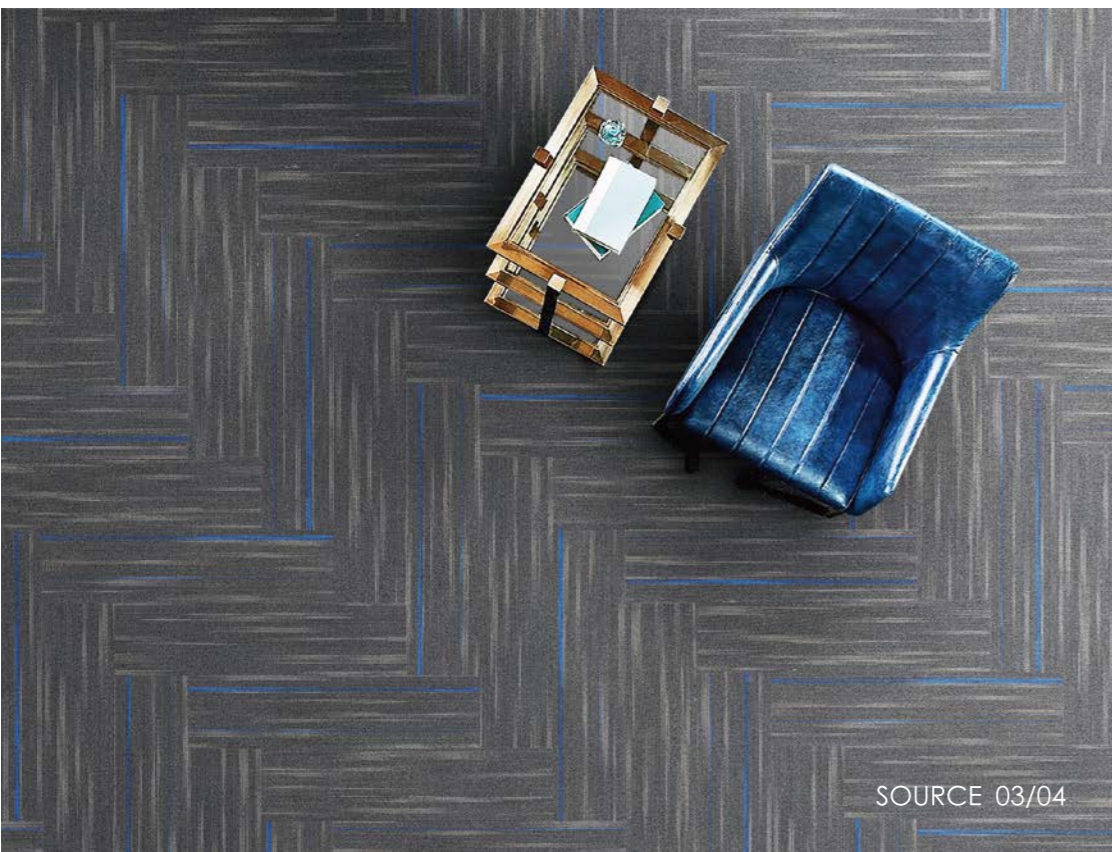

SOURCE 03/04



SOURCE 05/06





**Always hit the right note.  
Like music**

Design is about creating harmony and balance while using dynamics to keep things interesting.










SOURCE 07/08



SOURCE 08

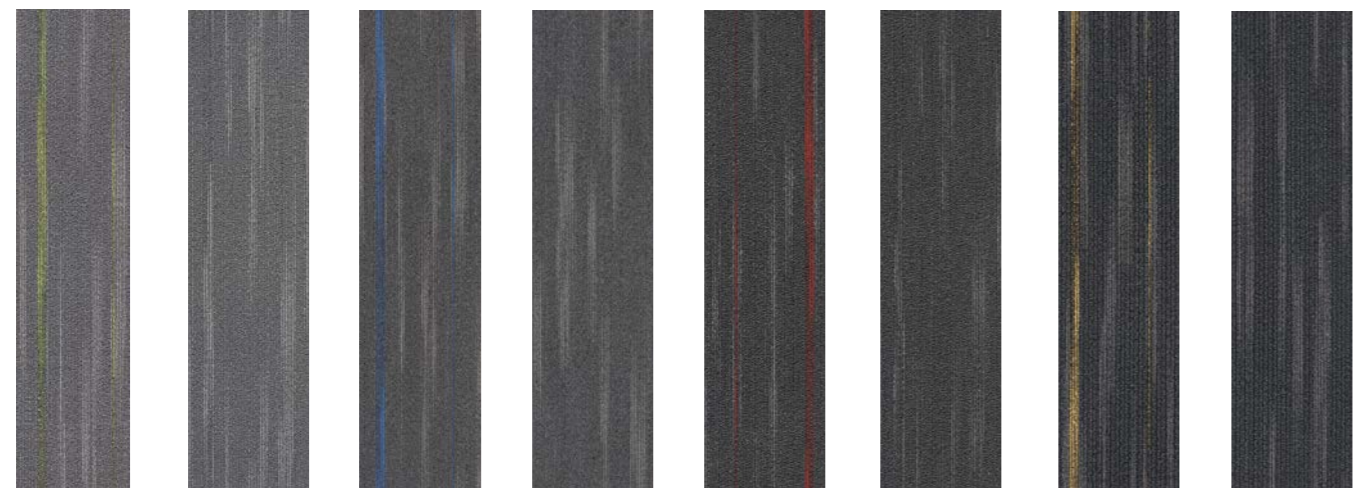

Source-01 Source-02 Source-03 Source-04 Source-05 Source-06 Source-07 Source-08

**SOURCE**


**SPECIFICATION:**

Face yarn:	100% Nylon
Dye method:	100% Solution dyed
Gauge:	1/12
Pile weight:	510g/m <sup>2</sup> (± 5%)
Total weight:	4800g/m <sup>2</sup> (± 5%)
Pile height:	4.5mm (± 0.5mm)
Total height:	6.6mm (± 0.5mm)
Backing:	PVC
Size:	25cm*100cm
Dimensional stability:	≤ 0.2%
Packaging box:	20 tiles/ 5 m <sup>2</sup> , pallet 200 m <sup>2</sup>

**PERFORMANCE**

Classification:	33
Castor chair rating:	A: intensive use
Fire classification :	Bf1-S1
Soil resistance :	2-3 grade ISO11378-2: 2001
Permanent antistatic:	≤ 2kv AATCC134-2016
Impact sound insulation:	ΔL <sub>w</sub> : 26 dB
Sound absorption:	Frequency Hz: 125 250 500 1000 2000 4000 α <sub>s</sub> 0.01 0.05 0.08 0.22 0.34 0.44
Noise reduction:	α <sub>w</sub> : 0.20
Colour fastness to light:	6 grade QB/T 2755-2005
Colour fastness to water:	4-5 grade QB/T 2755-2005
Rubbing fastness:	4-5 grade QB/T 2755-2005
Indoor air quality:	(GB18587-2001 A grade) TVOC ≤ 0.500mg/m <sup>2</sup> h Formaldehyde ≤ 0.050mg/m <sup>2</sup> h Styrene ≤ 0.400mg/m <sup>2</sup> h 4-phenylcyclohexene ≤ 0.050mg/m <sup>2</sup> h

Installation method

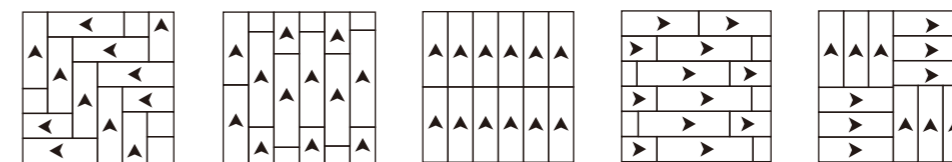

Herringbone Ashlar Monolithic Brick Basket

