




GLITTER
Carpet Tiles




Glitter
100#

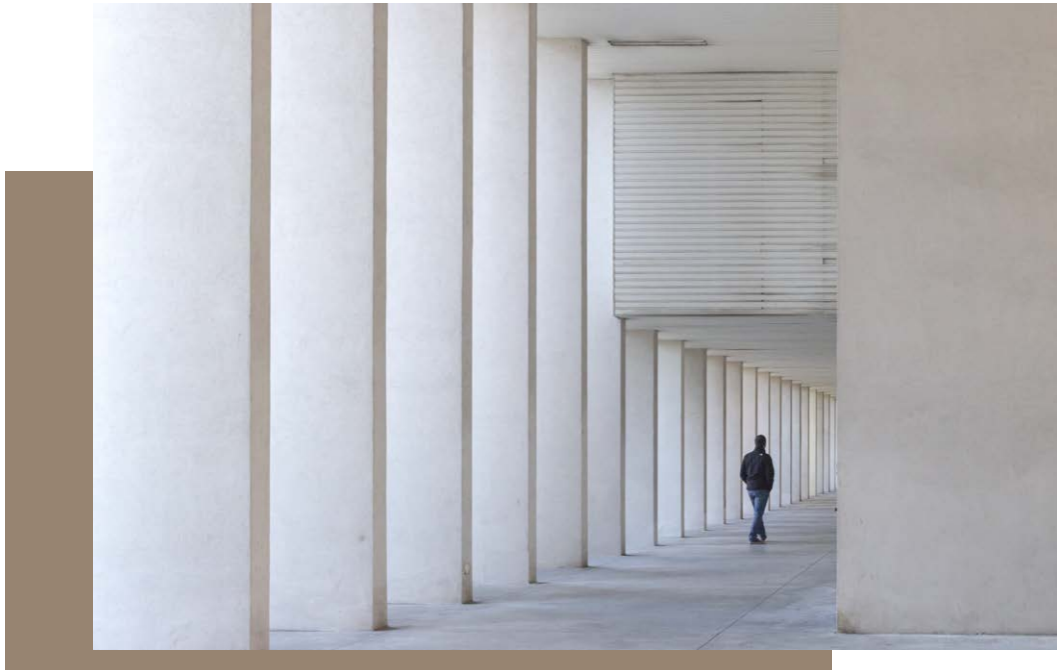

Glitter

200# 201# 202# 203# 204#

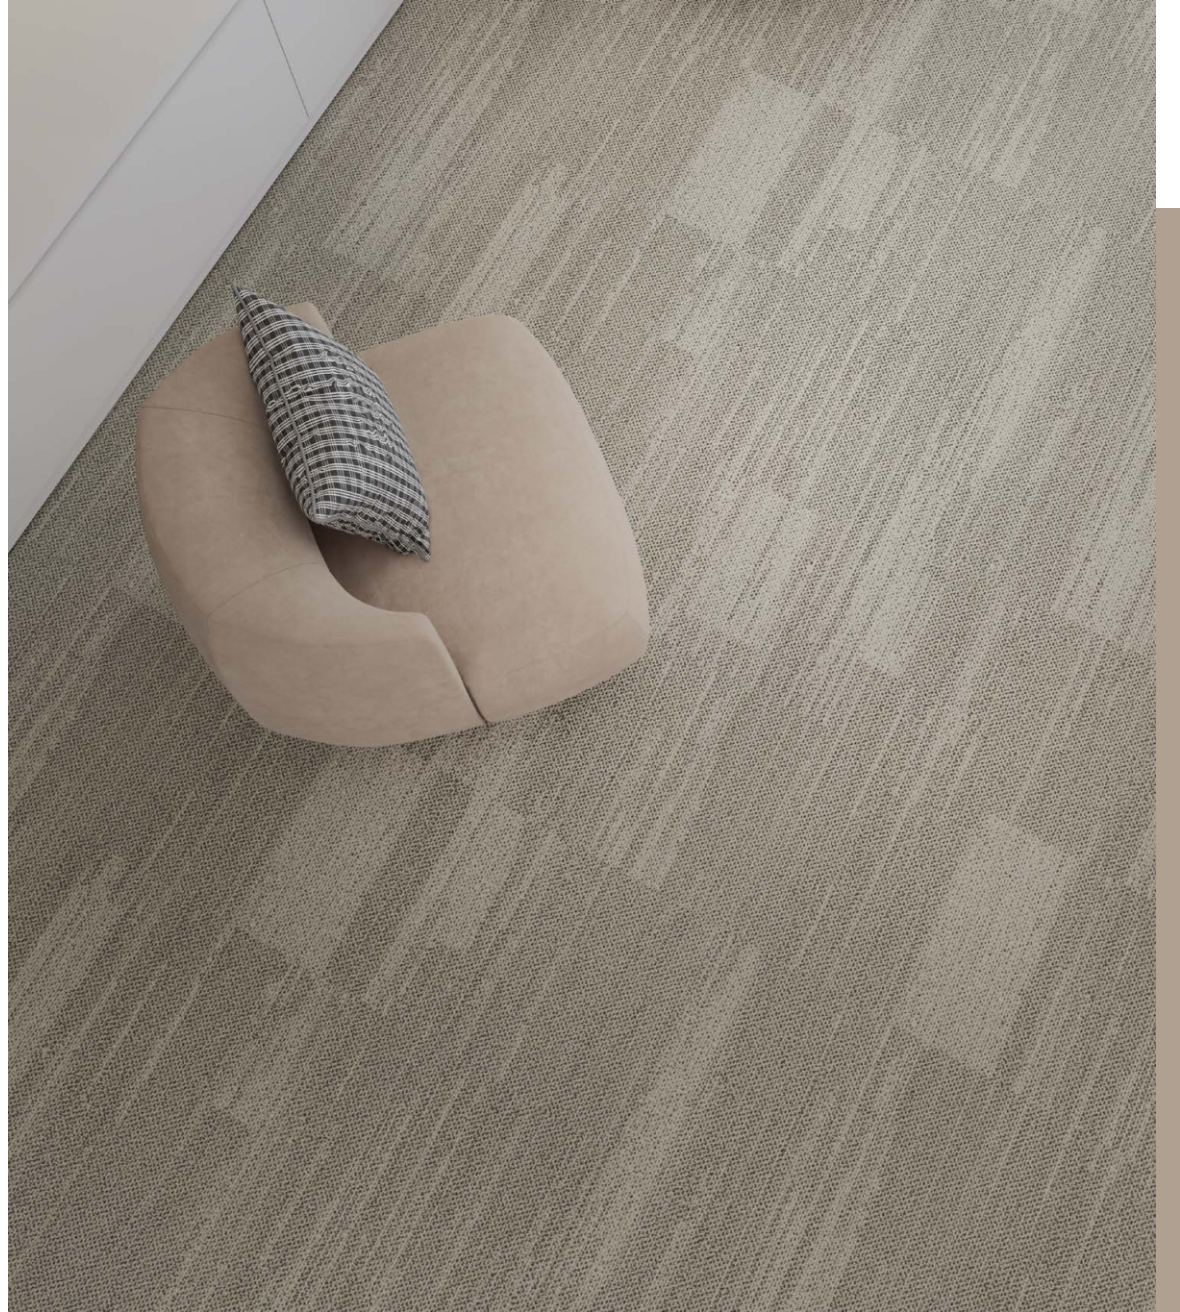




Glitter
400#





Glitter
300#

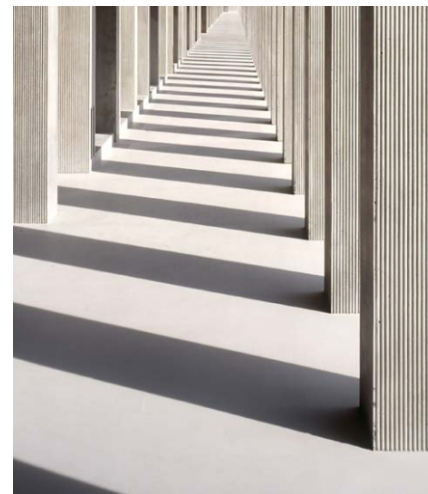



Glitter
500#

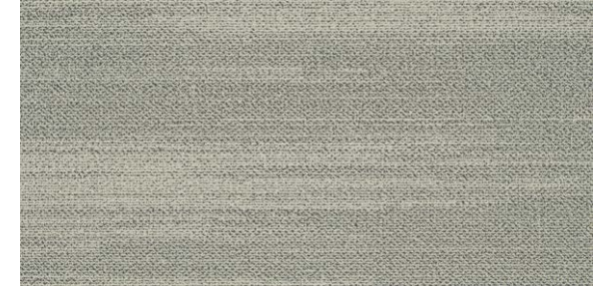

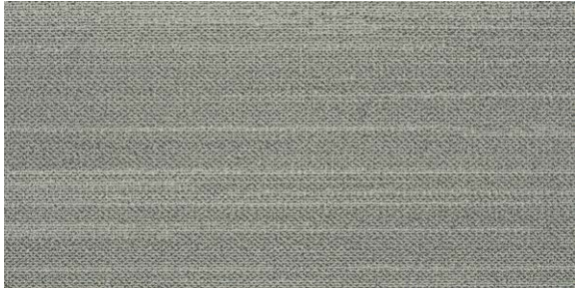

Glitter
600#






Glitter

700# 701# 702# 703# 704#



Glitter
800#

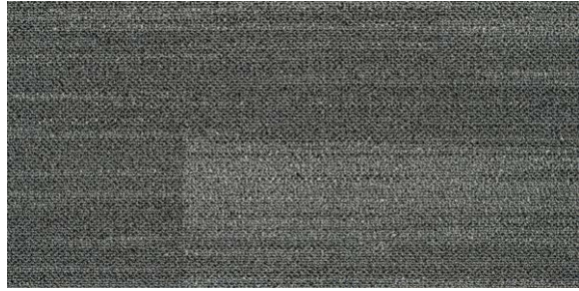



Glitter-100#



Glitter-200#



Glitter-201#



Glitter-202#



Glitter-203#



Glitter-204#



Glitter-300#



Glitter-400#



Glitter-500#



Glitter-600#



Glitter-700#



Glitter-701#



Glitter-702#



Glitter-703#



Glitter-704#



Glitter-800#

SPECIFICATION:

Face yarn:	100% Universal Nylon
Dye method:	100% Solution dyed
Gauge:	1/12
Pile weight:	500±20g/m ² (±5%)
Total weight:	3170g/m ² (±5%)
Pile height:	4/3/2mm
Total height:	5mm (±1mm)
Backing:	FPE
Size:	45.72cmx91.44cm(18"x36")
Dimensional stability:	≤0.2%
Packaging box:	16 tiles/6.688 m ²

PERFORMANCE

Classification:	33
Castor chair rating:	A: intensive use
Fire classification :	Class 1 (ASTM E648)
Stain Resistance :	Grade 8(AATCC 175)
Permanent antistatic:	≤2kv (GB/T 18044-2008)
Impact sound insulation:	ΔL _w :26 dB
Sound absorbtion:	Frequency Hz:125 250 500 1000 2000 4000
	α _s 0.01 0.05 0.08 0.22 0.34 0.44
Noise reduction:	α _w : 0.20
Colour fastness to light:	5 grade QB/T 2755-2005
Colour fastness to water:	4-5 grade QB/T 2755-2005
Rubbing fastness:	4-5 grade QB/T 2755-2005
Indoor air quality:	
(GB18587-2001 A grade)	TVOC ≤0.500mg/m ² h
	Formaldehyde ≤ 0.050mg/m ² h
	Styrene ≤ 0.400mg/m ² h
	4-phenylcyclohexene ≤ 0.050mg/m ² h

